


Keystone Jack 50131

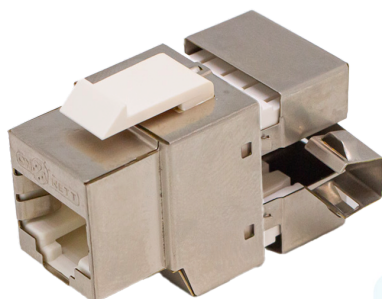

View the product
on the website

DETAILS

TECHNICAL FEATURES

Characteristic	Value
Dimension	mini-keystone
Mix	ABS high mechanical resistance flame retardant
IDC Terminals	nickel-plated phosphor bronze 50/60 micron
Contacts	nickel with 50 micron gold
Sticker	identifies connections to be performed according to EIA/TIA 568A or B
N° Plug-in insertions	750
Section of conductors (AWG)	22-26
Insulation resistance (m ohm)	500
Contact resistance (m ohm)	20
Maximum current allowed	1,5 A
Color	-
Standards	IEC 60603-7-5 (Standard on RJ45 connectors)
	ISO 11801 2° ed. (general systems)
	EIA/TIA 568B
	EN 50173 2 ed. (General wiring)

CODE TABLE

Code	Description	Color	Packaging	Packing
50131	RJ45 F/UTP cat. 5E socket with 180° connection	-	Bag 1 pc	12 pcs